




Beacon M3

CE IP65 F III Kg 1,900



TECHNICAL DATA

Application	Wall Surface Mounted Updown
Location	Outdoor/ Indoor
Light Source	LED
Optics	15°, 24°, 36°, 45°, 60°
LED Life time (L80B10)	50000 hours
Input Voltage / Current	110-240V AC(43-60Hz)
Control Gear	In-built
Connection details	Parallel Connection
Installation	Wall Surface mounted
Weight	1,9Kg
Dimension	Ø120 x 310mm
Supply	110-240V AC
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electric Protection	EMC, inrush current
Electrical Class	1
Working Temperature	-25°C - +50°C

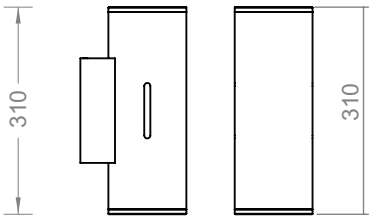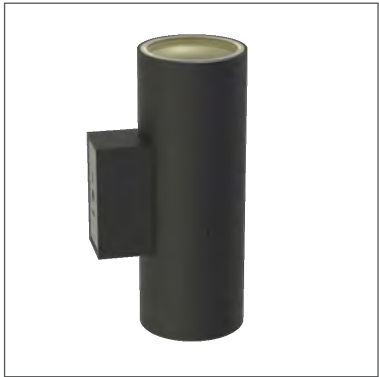


FINISHING

Materials	Die-cast aluminium
Finishing	Black, Grey, Red
Diffuser	Tempered Glass

Family	WATT	CCT	Optics	Finish	Power	Dimming	Options
BE - Beacon-M3	40 - 40W(20+20)	27-2700K	15 - 15°	B - Black	AC - AC110-240V	N - None	XXX
	60 - 60W(30+30)	30-3000K	24 - 24°	G - Grey		D - Dali	
		40-4000K	36 - 36°	R - Red			
		50-5000K	45 - 45°				
		60-6000K	60 - 60°				
		R-Red					
		G-Green					
		RB-Royal Blue					
		RGB-RGB					
		RGBW-RGBW					

Sample:BE - 40 - 27 - 15 - B - AC - N - XX

CONNECTION DIAGRAM ON/OFF

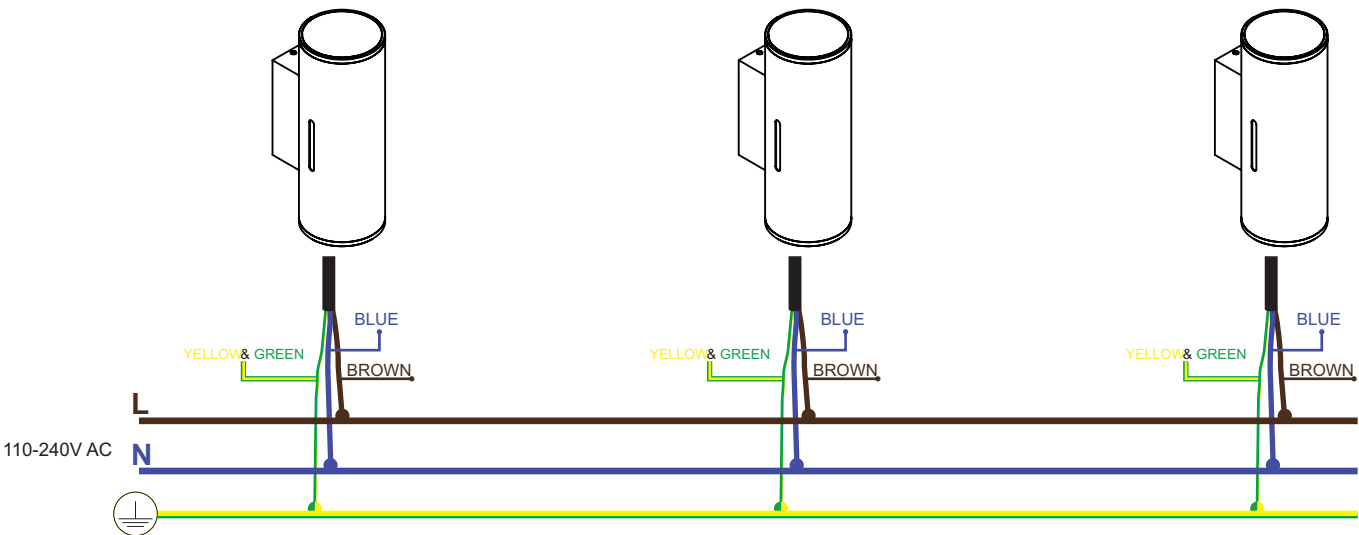

CONNECTION DIAGRAM DALI

