

Arena R

CE IP67



Kg Kg 7,0




TECHNICAL DATA

Application	Recessed mounted (Wall, Floor)
Location	Outdoor/ Indoor
Light Source	LED
Optics	5°, 10°, 15°, 24°, 36°, 60°, 90°, 10° x 90°, 20° x 40°
LED Life time (L80B10)	50000 hours
Control Gear	In-built / Remote
Connection details	Parallel Connection
Installation	Recessed mounted (Wall, Floor)
Weight	7,0Kg / 1000mm
Dimension	L1000 x W 109 x H 78mm, L600 x W 109 x H78mm
Supply	100-265V AC / 24V DC
LED Module	High-power LEDs on metal-core PCB. Collimating lens made of optical polymer/pmma
Anti-Glare	Option
Electric Protection	EMC, inrush current
Electrical Class	100-265V AC(43-60Hz) / 24V DC
Working Temperature	-25°C - +50°C
Lumen	3570 lm @ 36W

FINISHING

Materials	Die-cast aluminium,
Finishing	316 Stainless Steel Front Plate
Diffuser	Tempered Glass

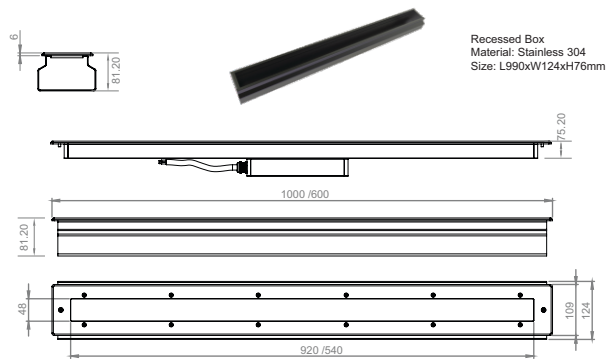

Family	Type	SIZE	WATT	CCT	Optics	Finish	Power	Dimming	Options
AR-Arena	R - Recessed	60 - 600mm	18 - 18(600mm)	22 - 2200K	5 - 5°	SS - Stainless Steel	24 - 24V	ND - Non Dim	
		100 - 1000mm	36 - 36(1000mm)	27 - 2700K	10 - 10°		AC - 240V AC		
				30 - 3000K	15 - 15°		48 - 48V		
				40 - 4000K	24 - 24°				
				50 - 5000K	36 - 36°				
				60 - 6000K	60 - 60°				
				RGB - RGB	90 - 90°				
				RGBW - RGBW	10x90 - 10°x90°				
				XX - Custom	20x40 - 20°x40°				

Sample: AR - R - 60 - 18 - 22 - 5 - SS - 24 - ND

**Standard Non Dimmable
DALI / 1-10V as option for mono
DMX available for RGB / RGBW

**Dali/AN/ND- for Mono
RGB/RGBW-only for Dmx